


ALUMINIUM SCAFFOLD PRODUCT CATALOG



ALUMINIUM SCAFFOLD

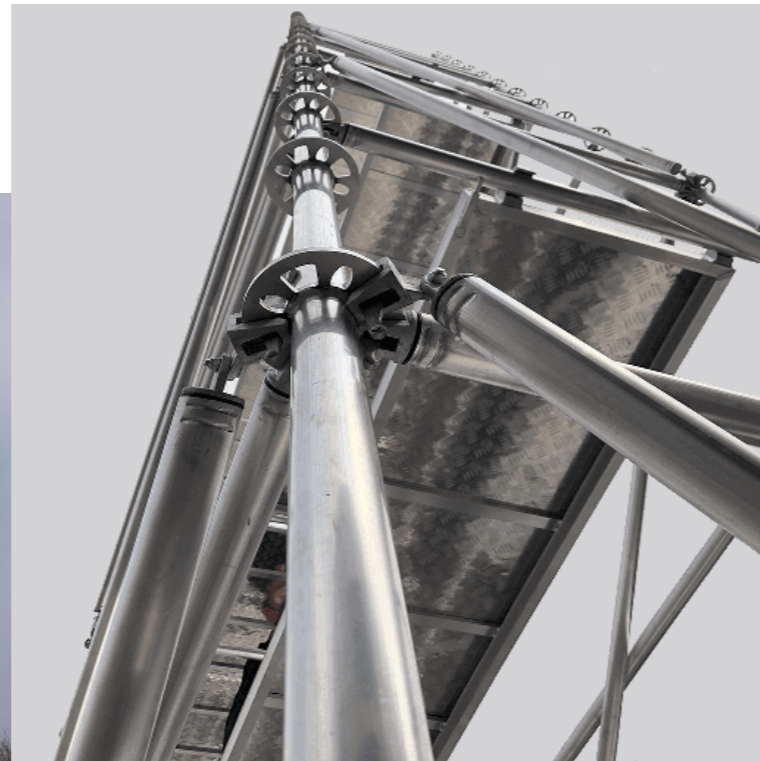

ALUMINIUM SCAFFOLD

Folding Ladder Scaffold

Model	D 0.8m	D 2.2m
Exterior Size m	1.5x0.52x1.5	1.62x0.52x3
Platform Height m	0.8	2.2
Platform Size m	1.45x0.45	1.45x0.45
Product Weight kg	18.2	34.2
40" (pcs)	358	206

Platform Load Rating: 230kg

Model	D 0.8m	D 2.2m
Rung Frame 5	2	-
Folded Frame	-	2
Platform with Hatch	1	1
Horizontal Brace	3	4
Diagonal Brace	1	4
Outrigger	-	2
Wheel	2	2



Basic Scaffold

Model	B 1.88m
Exterior Size m	1.62x0.73x1.88
Platform Height m	1.1
Platform Size m	1.62x0.32
Product Weight kg	25.8
40" (pcs)	174

Platform Load Rating: 150kg



Model	B 1.88m
Folded Frame	1
Horizontal Brace	2
Platform	2
Wheel	4

Extension Ladder Scaffold



Model	T0 3.4m	T0 4.5m	T0 5.6m	T0 6.2m
Exterior Size m	1.8x1.92x4.57	1.8x1.92x5.77	2.21x2.12x6.81	2.21x2.12x7.37
Platform Height m	1.68~3.36	2.32~4.56	2.8~5.6	3.08~6.16
Platform Size m	1.45x0.6	1.45x0.6	1.88x0.6	1.88x0.6
Product Weight kg	109.2	127	146.7	163.9
40" (pcs)	80	59	58	53

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	T0 3.4m	T0 4.5m	T0 5.6m	T0 6.2m
Extension Ladder	2x9	2x12	2x13	2x14
Platform with Hatch	1	2	2	2
Outrigger	2	2	2	2
Horizontal Brace	8	8	8	8
Diagonal Brace	4	4	4	4
Support Brace	4	4	4	4
Bottom Rail	2	2	2	2
Platform	-	-	-	1
Toeboard	1	1	1	1
Wheel	4	4	4	4

Extension Ladder Scaffold



Model	T 3.3m	T 4.4m	T 5.5m	T 6.1m	T 8.2m
Exterior Size m	1.8x1.92x4.05	1.8x1.92x5.17	2.2x2.1x6.29	2.2x2.1x6.85	2.2x2.6x9.08
Platform Height m	1.91~3.3	2.47~4.4	3.03~5.5	3.31~6.1	3.13~8.2
Platform Size m	1.45x0.45	1.45x0.45	1.88x0.45	1.88x0.45	1.88x0.56
Product Weight kg	81.5	88.4	108	112.4	164
40" (pcs)	87	77	67	63	32

Platform Load Rating: 230kg

Model	T 3.3m	T 4.4m	T 5.5m	T 6.1m	T 8.2m
Extension Ladder	2x8	2x10	2x12	2x13	3x13
Platform with Hatch	1	1	1	1	1
Outrigger	2	2	2	2	2
Horizontal Brace	8	8	8	8	12
Diagonal Brace	4	4	4	4	6
Support Brace	-	-	4	4	4
Bottom Rail	2	2	2	2	2
Wheel	4	4	4	4	4

Economical Scaffold

Model	E 2.0m	E 3.0m	E 4.0m	E 5.0m	E 6.0m
Exterior Size m	1.5x0.7x3.18	1.5x0.7x3.9	1.5x0.7x4.9	1.5x0.7x5.9	1.5x0.7x6.9
Platform Height m	2	3	4	5	6
Platform Size m	1.5x0.6	1.5x0.6	1.5x0.6	1.5x0.6	1.5x0.6
Product Weight kg	42.2	49.9	64.3	76.7	82.5
40" (pcs)	189	166	115	103	92

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	E 2.0m	E 3.0m	E 4.0m	E 5.0m	E 6.0m
Rung Frame 8	-	-	-	2	2
Rung Frame 7	2	4	4	4	4
Rung Frame 4	2	-	2	-	2
Platform with Hatch	1	1	2	2	2
Diagonal Brace	2	4	6	8	10
Horizontal Brace	6	6	6	10	10
Outrigger	2	2	2	2	2
Wheel	4	4	4	4	4



Mini Snap Scaffold

Model	MS 0.9m	MS 1.8m	MS 3.5m	MS 5.2m
Exterior Size m	2x0.75x1.94	2x0.75x2.86	2x0.75x4.55	2x0.75x6.25
Platform Height m	0.9	1.8	3.5	5.2
Platform Size m	2x0.6	2x0.6	2x0.6	2x0.6
Product Weight kg	47.2	66.7	123	141
40" (pcs)	215	134	67	53

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	MS 0.9m	MS 1.8m	MS 3.5m	MS 5.2m
Rung Folded Frame 6	1	1	1	1
Rung Frame 6	-	-	2	4
rung Guard rail 2	-	2	2	2
Platform with Hatch	1	1	2	3
Diagonal Brace	-	-	2	4
Horizontal Brace	2	5	5	5
Hinge	1	1	1	1
Stabilizer	-	-	4	4
Toeboard	-	1	1	1
Wheel	4	4	4	4




Aluminium Mini Tower

Model	MT 2.0m	MT 4.0m	MT 6.0m
* Exterior Size m	1x0.68x3.3	1x0.68x5.3	1x0.68x7.3
Platform Height m	2.1	4.1	6.1
Platform Size m	1x0.6	1x0.6	1x0.6
Product Weight kb	75	131	168
40" (pcs)	150	84	61

* Exterior Length: 1.5m / 1.2m - Optional

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	MT 2.0m	MT 4.0m	MT 6.0m
Rung Frame 4	6	10	14
Toeboards	1	1	1
Platform with Hatch	1	2	3
HV Handrail	4	6	8
Diagonal Brace	2	4	6
Stabilizer	-	4	4
Wheel	4	4	4



Folded Scaffold - V Type

Model	V 0.9m	V 1.8m	V 3.5m	V 5.2m
Exterior Size m	1.4x0.68x1.94	1.4x0.68x2.84	1.4x0.68x4.52	1.4x0.68x6.26
Platform Height m	0.9	1.8	3.5	5.2
Platform Size m	1.4x0.6	1.4x0.6	1.4x0.6	1.4x0.6
Product Weight kg	34.2	45.5	111.2	134.2
40" (pcs)	219	136	71	57

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	V 0.9m	V 1.8m	V 3.5m	V 5.2m
Folding Frame	1	1	1	1
Rung Frame 6	-	-	2	4
Guard Rail	-	2	2	2
Platform with Hatch	1	1	2	3
Handrail	-	2	2	2
Diagonal Brace	-	-	2	4
Toeboard	-	-	1	1
Stabilizer	-	-	4	4
Wheel	4	4	4	4



Folded Scaffold - H Type

Model	H 0.9m	H 1.8m	H 3.5m	H 5.2m
Exterior Size m	1.8x0.68x1.94	1.8x0.68x2.84	1.8x0.68x4.52	1.8x0.68x6.26
Platform Height m	0.9	1.8	3.5	5.2
Platform Size m	1.8x0.6	1.8x0.6	1.8x0.6	1.8x0.6
Product Weight kg	42	53	119.4	149.4
40" (pcs)	162	105	58	47

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	H 0.9m	H 1.8m	H 3.5m	H 5.2m
Folding Frame	1	1	1	1
Rung Frame 6	-	-	2	4
Guard Rail	-	2	2	2
Platform with Hatch	1	1	2	3
Handrail	-	2	2	2
Diagonal Brace	-	-	2	4
Toeboard	-	-	1	1
Stabilizer	-	-	4	4
Wheel	4	4	4	4



Single Width Scaffold

Model	SW 2.0m	SW 3.3m	SW 5.0m	SW 6.2m
Exterior Size m	1.915x0.68x3.04	1.915x0.68x4.27	1.915x0.68x5.91	1.915x0.68x7.14
Platform Height m	2	3.3	5	6.2
Platform Size m	1.915x0.6	1.915x0.6	1.915x0.6	1.915x0.6
Product Weight kg	80.8	121.3	149.5	182.5
40" (pcs)	128	79	60	49

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	SW 2.0m	SW 3.3m	SW 5.0m	SW 6.2m
Rung Frame 5	2	2	2	6
Rung Frame 4	-	-	2	-
Rung Frame 3	-	2	2	-
Guard Rail	2	2	2	2
Platform with Hatch	1	1	2	3
Handrail	2	2	2	2
Diagonal Brace	2	6	8	12
Horizontal Brace	2	2	2	2
Bottom Brace	1	1	1	1
Toeboard	1	1	1	1
Stabilizer	-	4	4	4
Wheel	4	4	4	4



Folded Scaffold - HF Type

Model	HF 0.9m	HF 1.8m	HF 3.5m	HF 5.2m
Exterior Size m	1.8x0.68x1.94	1.8x0.68x2.84	1.8x0.68x4.52	1.8x0.68x6.26
Platform Height m	0.9	1.8	3.5	5.2
Platform Size m	1.8x0.6	1.8x0.6	1.8x0.6	1.8x0.6
Product Weight kg	41.8	52	117.4	145.4
40" (pcs)	161	104	57	46

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	HF 0.9m	HF 1.8m	HF 3.5m	HF 5.2m
Folding Frame	1	1	1	1
Rung Frame 6	-	-	2	4
Guard Rail	-	2	2	2
Platform with Hatch	1	1	2	3
Handrail	-	2	2	2
Diagonal Brace	-	-	2	4
Toeboard	-	-	1	1
Stabilizer	-	-	4	4
Wheel	4	4	4	4




Single Width Scaffold with Vertical Ladder

Model	SWI 4.2m	SWI 6.2m	SWI 8.2m	SWI 10.2m
Exterior Size m	2x0.75x5.28	2x0.75x7.28	2x0.75x9.28	2x0.75x11.28
Platform Height m	4.2	6.2	8.2	10.2
Platform Size m	2x0.6	2x0.6	2x0.6	2x0.6
Product Weight kg	140.9	178.2	244.7	282
40" (pcs)	81	58	42	35

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	SWI 4.2m	SWI 6.2m	SWI 8.2m	SWI 10.2m
Rung Ladder Frame 5	2	3	4	5
Rung Frame 5	2	3	4	5
Guard Rail	2	2	2	2
Platform with Hatch	1	2	4	5
Bottom Brace	1	1	1	1
Diagonal Brace	6	8	12	14
Horizontal Brace	6	6	10	10
Toeboard	1	1	1	1
Stabilizer	4	4	4	4
Wheel	4	4	4	4

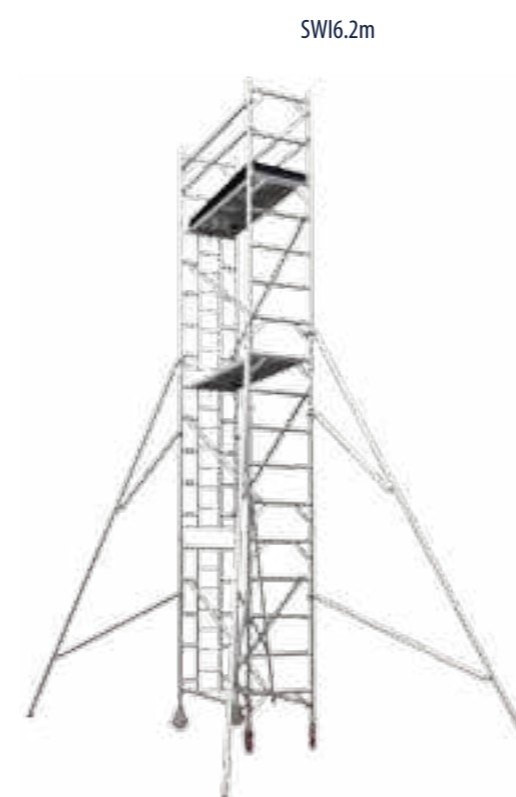

Single Width Scaffold with Inclined Ladder

Model	SWS 2.2m	SWS 3.0m	SWS 3.8m	SWS 4.2m	SWS 5.0m	SWS 6.3m
Exterior Size m	2.5x0.68x3.23	2.5x0.68x4.03	2.5x0.68x4.83	2.5x0.68x5.23	2.5x0.68x6.03	2.5x0.68x7.23
Platform Height m	2.2	3	3.8	4.2	5	6.3
Platform Size m	2.5x0.6	2.5x0.6	2.5x0.6	2.5x0.6	2.5x0.6	2.5x0.6
Product Weight kg	116	158	170	172.2	183.8	195
40" (pcs)	114	66	63	62	60	56

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	SWS 2.2m	SWS 3.0m	SWS 3.8m	SWS 4.2m	SWS 5.0m	SWS 6.3m
Rung Frame 5	2	-	2	4	2	6
Rung Frame 4	-	2	2	-	2	-
Rung Frame 3	-	2	-	-	2	-
6m Extension Ladder	-	-	1	1	1	-
4m Extension Ladder	-	1	-	-	-	2
Guard Rail	2	2	2	2	2	2
Platform with Hatch	1	1	1	1	1	2
3m Single Ladder	1	-	-	-	-	-
Diagonal Brace	4	6	8	8	10	12
Horizontal Brace	6	6	6	6	6	6
Bottom Brace	1	1	1	1	1	1
Toeboard	1	1	1	1	1	1
Stabilizer	-	4	4	4	4	4
Ladder Support	1	1	1	1	1	2
Wheel	4	4	4	4	4	4



Double Width Scaffold with Inclined Ladder

Model	DWS 2.2m	DWS 3.0m	DWS 3.8m	DWS 4.2m	DWS 5.0m	DWS 6.3m
Exterior Size m	2.5x1.25x3.23	2.5x1.25x4.03	2.5x1.25x4.83	2.5x1.25x5.23	2.5x1.25x6.03	2.5x1.25x7.23
Platform Height m	2.2	3	3.8	4.2	5	6.3
Platform Size m	2.5x0.54	2.5x0.54	2.5x0.54	2.5x0.54	2.5x0.54	2.5x0.54
Product Weight kg	146	191	209	212.4	226.4	255
40" (pcs)	72	52	50	49	46	41

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	DWS 2.2m	DWS 3.0m	DWS 3.8m	DWS 4.2m	DWS 5.0m	DWS 6.3m
Rung Frame 5	2	-	2	4	2	6
Rung Frame 4	-	2	2	-	2	-
Rung Frame 3	-	2	-	-	2	-
4m Extension Ladder	-	1	-	-	-	2
6m Extension Ladder	-	-	1	1	1	-
Guard Rail	2	2	2	2	2	2
Platform with Hatch	1	1	1	1	1	2
Platform	1	1	1	1	1	2
3m Single Ladder	1	-	-	-	-	-
Diagonal Brace	4	6	8	8	10	12
Horizontal Brace	6	6	6	6	6	6
Bottom Brace	1	1	1	1	1	1
Toeboard	1	1	1	1	1	1
Stabilizer	/	4	4	4	4	4
Ladder Support	1	1	1	1	1	2
Wheel	4	4	4	4	4	4




Double Width Scaffold with Vertical Ladder

Model	DWI 4.0m	DWI 4.8m	DWI 6.0m	DWI 8.0m	DWI 10.0m
Exterior Size m	2.5x1.25x5.29	2.5x1.25x6.29	2.5x1.25x7.29	2.5x1.25x9.29	2.5x1.25x11.29
Platform Height m	4	4.8	6	8	10
Platform Size m	2.5x0.54	2.5x0.54	2.5x0.54	2.5x0.54	2.5x0.54
Product Weight kg	177.6	227.9	249.6	316.5	347
40" (pcs)	43	33	30	23	20

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	DWI 4.0m	DWI 4.8m	DWI 6.0m	DWI 8.0m	DWI 10.0m
Rung Frame 5	2	-	3	4	5
Rung Ladder Frame 5	2	-	3	4	5
Rung Frame 4	-	3	-	-	-
Rung Ladder Frame 4	-	3	-	-	-
Guard Rail	2	2	2	2	2
Platform with Hatch	1	2	2	3	3
Platform	1	2	2	3	3
Handrail	2	2	2	2	2
Diagonal Brace	8	10	14	18	22
Horizontal Brace	2	2	2	2	2
Bottom Brace	1	1	1	1	1
Toeboard	1	1	1	1	1
Stabilizer	4	4	4	4	4
Wheel	4	4	4	4	4

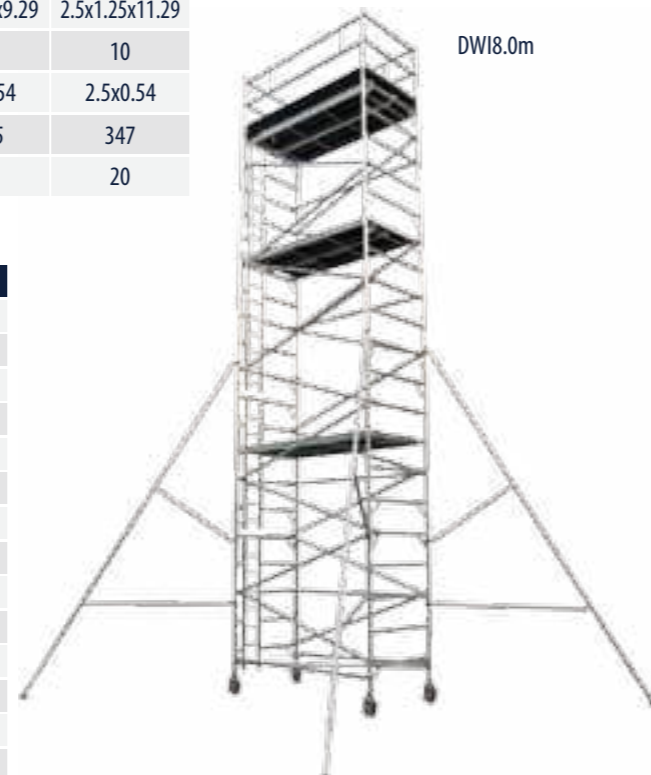


Double Width Scaffold with Stair Case

Model	DWC 4.4m	DWC 6.3m	DWC 8.3m	DWC 10.3m	DWC 12.3m
Exterior Size m	2.5x1.45x5.6	2.5x1.45x7.56	2.5x1.45x9.52	2.5x1.45x11.48	2.5x1.45x13.44
Platform Height m	4.4	6.3	8.3	10.3	12.3
Platform Size m	2.5x0.6	2.5x0.6	2.5x0.6	2.5x0.6	2.5x0.6
Product Weight kg	298.7	386.4	474	561.7	649.3
40" (pcs)	15	11	8	7	6

Product Standard: EN 1004 Platform Load Rating: 230kg

Model	DWC 4.4m	DWC 6.3m	DWC 8.3m	DWC 10.3m	DWC 12.3m
Rung Frame 7	4	6	8	10	12
Rung Frame 4	2	2	2	2	2
Rung Frame 1	2	2	2	2	2
Platform	2	3	4	5	6
Stairway	2	3	4	5	6
Stair Handrail	2	3	4	5	6
Advance Guardrail	2	3	4	5	6
Top platform guardrail set	1	1	1	1	1
Diagonal Brace	2	2	2	2	2
Horizontal Brace	2	2	2	2	2
Bottom Brace	1	1	1	1	1
Toeboard set	1	1	1	1	1
Stabilizer	4	4	4	4	4
Wheel	4	4	4	4	4

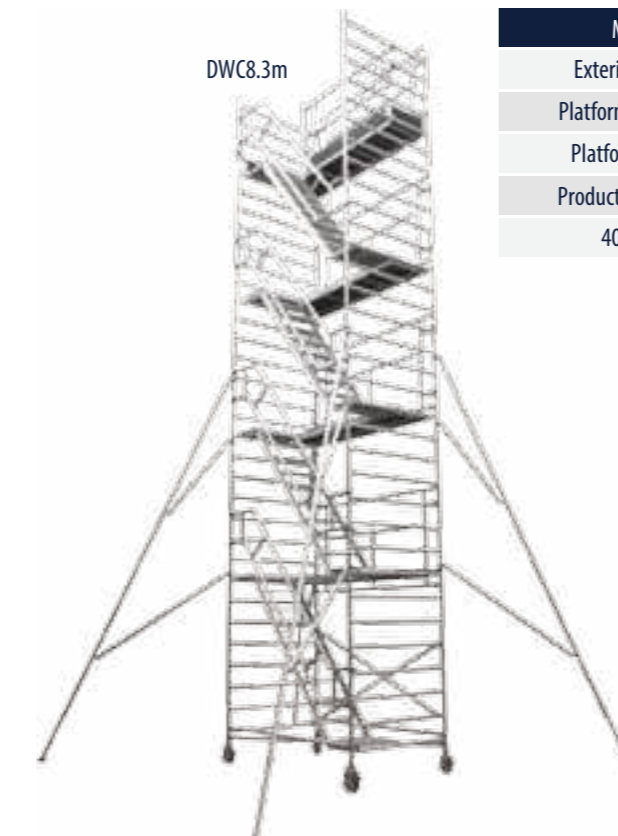




Aluminum kwikstage is a universally established prefabricated scaffolding system. Used for both access and shoring applications, its inherent simplicity is what makes kwikstage become a more versatile, efficient and cost effective alternative to traditional tube and coupler scaffolds.

Product Standard: EN 1004, AS/NZS 1576 Platform Load Rating: 230kg



Base Jack



Hopups



Modular Construction



Single Ladder

Ledger



Model	KS 506	KS 680	KS 1280	KS 2000	KS 2500	KS 3200
Tube Diameter mm	48.4	48.4	48.4	48.4	48.4	48.4
Tube Thickness mm	2.6	2.6	2.6	2.6	2.6	2.6
Length mm	506	680	1280	2000	2500	3200
Product Weight kg	1.1	1.3	1.9	2.6	3.2	3.9

Standard



Model	KS 0.5	KS 1.0	KS 1.5	KS 2.0	KS 2.5	KS 3.0
Tube Diameter mm	48.4	48.4	48.4	48.4	48.4	48.4
Tube Thickness mm	2.6	2.6	2.6	2.6	2.6	2.6
Length mm	500	1000	1500	2000	2500	3000
Product Weight kg	2.6	3.2	3.8	4.4	5	6.1

Diagonal Brace



Model	KS 1583	KS 1647	KS 1972	KS 3202	KS 3534
Tube Diameter mm	44.4	44.4	44.4	44.4	44.4
Tube Thickness mm	3.4	3.4	3.4	3.4	3.4
Length mm	1583	1647	1972	3202	3534
Product Weight kg	1.8	1.9	2.3	3.6	3.9

Platform



Model	KS-A(P)	KS-B(P)	KS-C(P)	KS-D(P)
Width mm	600	600	600	600
Length mm	1364	2084	2584	3284
Product Weight kg	13	18	21	27

Platform with Hatch



Model	KS-A(PH)	KS-B(PH)	KS-C(PH)	KS-D(PH)
Width mm	600	600	600	600
Length mm	1364	2084	2584	3284
Product Weight kg	11	16	19	25



Multidirectional aluminum ringlock scaffolding is all-round multi-directional aluminum alloy scaffold. It is engineered to employ single aluminum tubes without height restriction and much more flexible than portal frame scaffold, applied to any height, any venue, and any complex engineering condition.

Product Standard: EN 1004, AS/NZS 1576 Platform Load Rating: 230kg



Base Jack



Platform with Hatch



Modular Construction



Stairway



Ledger

Model	BS 732	BS 1092	BS 1332	BS 1400	BS 2072	BS 2572
Tube Diameter mm	48.4	48.4	48.4	48.4	48.4	48.4
Tube Thickness mm	3.2	3.2	3.2	3.2	3.2	2.6
Length mm	732	1092	1332	1400	2072	2572
Product Weight kg	1.4	1.9	2.4	2.7	3.1	3.6



Standard

Model	BS 1.0	BS 2.0	BS 3.0	BS 4.0
Tube Diameter mm	48.4	48.4	48.4	48.4
Tube Thickness mm	3.2	3.2	3.0	3.2
Length mm	1000	2000	3000	4000
Product Weight kg	1.9	3.1	4.4	5.8



Diagonal Brace

Model	BS 732x2000	BS 1332x2000	BS 1572x2000	BS 2572x2000
Tube Diameter mm	48.3	48.3	48.3	48.3
Tube Thickness mm	2	2	2	2
Length mm	732	1332	1572	2572
Product Weight kg	2.4	2.7	2.8	3.3



Platform

Model	BS-A(P)	BS-B(P)	BS-C(P)	BS-D(P)
Width mm	600	600	600	600
Length mm	1400	1572	2072	2572
Product Weight kg	15	16	19	22



Platform with Hatch

Model	BS-A(PH)	BS-B(PH)	BS-C(PH)	BS-D(PH)
Width mm	600	600	600	600
Length mm	1400	1572	2072	2572
Product Weight kg	14	15	18	21

ALUMINIUM 'Z' STAIRS

- Much safer to use than ladders, carry tools and equipment easily
- Lightweight – easy one man handling
- Fast – dramatically increase scaffolding efficiency
- Stairs can be manufactured to fit ALL scaffold systems



Model	Z 2.0m	Z 2.5m	Z 3.0m
Height mm	1800	2000	3000
Length mm	2000	2500	3000
Length mm	540	640	640
Product Weight kg	18.9	21.9	25.9
Load Rating kg	230	230	230

STILLAGES

Aluminium Stillages are designed for store scaffold system components, reducing 'shrinkage' onsite with easy visual stocktake

Aluminium vs. Steel Aluminium lasts longer, is lighter weight and quicker to erect looks better over time, will not corrode, and is cheaper to transport



Model	S-400
Height mm	1040
Length mm	1385
Length mm	1385
Product Weight kg	11.5
Load Rating kg	400

Aluminium Truss Beams

The Aluminium Beam has been designed utilising many decades of aluminium engineering expertise

Robust and lightweight aluminium construction and fully-welded joints



Lightweight aluminium construction - less than half the weight of steel
 All joints fully-welded using the latest CMT technology
 All node gaps are large enough to connect a standard scaffold fitting
 Designed in accordance with all relevant standards

Model	A 4.0m	A 6.0m	A 8.0m
Height mm	400	400	400
Length mm	4000	6000	8000
Length mm	48.4	48.4	48.4
Product Weight kg	15.7	22.9	30.5
Load Rating kg	150	150	150